#31721

REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

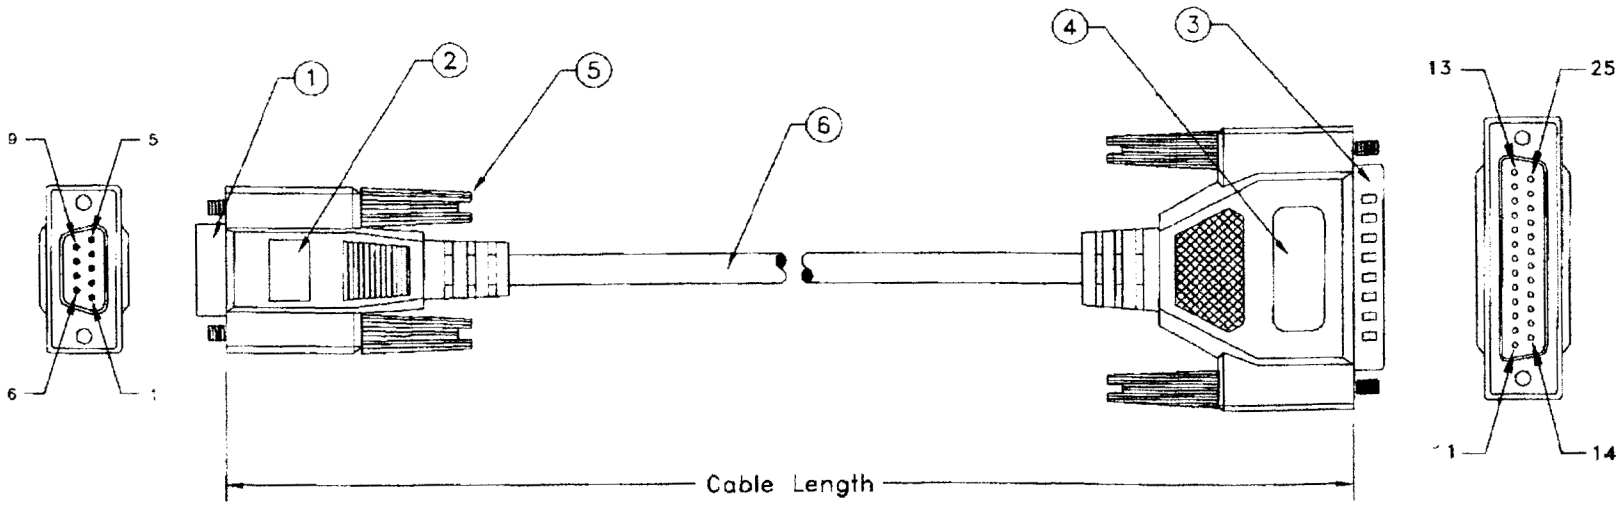

Pin Assignment

DB 9 Female	DB25 Male
1	8
2	3
3	2
4	20
5	7
6	6
7	4
8	5
9	22
G	G

PART NO.	CABLE LENGTH
10D1-02301	1 ft.
10D1-02303	3 ft.
10D1-02306	6 ft.
10D1-02310	10 ft.
10D1-02315	15 ft.
10D1-02325	25 ft.

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 9 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 25 Pin Male W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED:
1. DIMENSION ARE IN INCHS
2. TOLERANCES:
   DECIMALES X.XX ±0.25
3. DO NOT SCALE DRAWING
4. REMOVE ALL BURRS AND BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY
JDMTOP Enterprises Corp.

CUSTOMER
R.F.D. NO
DRAWN DATE
CHECKED
CUSTOMER APPROVAL

TITLE
Molded AT Modem Cable Assembly
(DB9 F / DB25 M, 9C)

SIZE	DWG NO.	PART NO.	REV
	10D1-023	10D1-023XX	A

SCALE: NONE RELEASE DATE: 05/18/94 SHEET: 1 OF 1